


**1.3247 HSS**

HS2-9-1-8 (M42)


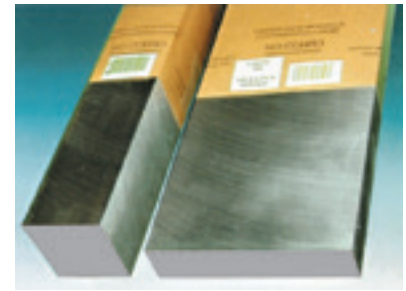


Pre-rettificati


TOLLERANZA		RUGOSITÀ	
Spessore	+ 0,20 / 0 mm	N 7	Rettificato Ra 1,6
Larghezza	+ 0,20 / 0 mm	N 8	Prelavorato, finemente fresato Ra 3,2
Lunghezza	+ 0 / 40 mm	N 15	Segato Ra 25

Lunghezza: **505 mm**

<b>B</b> <b>S</b> →	3,2	4,2	5,2	6,2	8,2	10,2	12,2	15,2	20,2	25,2	30,2	← <b>S</b> <b>B</b>
20,2	•	•	•	•	•	•	•	•	•	•	•	20,2
25,2	•	•	•	•	•	•	•	•	•	•	•	25,2
30,2	•	•	•	•	•	•	•	•	•	•	•	30,2
40,2	•	•	•	•	•	•	•	•	•	•	•	40,2
50,2	•	•	•	•	•	•	•	•	•	•	•	50,2
60,2	•	•	•	•	•	•	•	•	•	•	•	60,2
80,2					•	•	•	•	•	•	•	80,2
100,4					•	•	•	•	•	•		100,4
↑ <b>B</b> <b>S</b> →	3,2	4,2	5,2	6,2	8,2	10,2	12,2	15,2	20,2	25,2	30,2	← <b>S</b> ↑ <b>B</b>



**BARRE TONDE**  
**C= FINEMENTE RETTIFICATE**  
 Rettificate secondo DIN 7154 (ISO h8)



TOLLERANZA		RUGOSITÀ	
Diametro	h 8	N 7	Rettificato Ra 1,6
Lunghezza	+ 5 / 0 mm	N 15	Segato Ra 25

Lunghezza: 1000 mm

6	8	10	12	15	16	20	25	30	32	40	50
		•	•	•		•	•	•		•	

Stato di fornitura: Ricotto 900N/mm<sup>2</sup>

Codice colore: **ARGENTO ROSSO** per 1.3247

Durezza raggiungibile: Hrc 67