

CODICE / Item no.

N50

Temperatura di applicazione:
240°C
Application temperature: 240° C


Conducibilità termica: 0,25 W/mk
Thermal conductivity: 0,25 W/mk

Densità: 2,0 g/cm³
Dense: 2,0 g/cm³

Esempio di ordine:
1 pezzo N50 95/95/3

Ordering - example:
1 piece N50 95/95/3

PIASTRE ISOLANTI INSULATING PLATE P=600 N/mm²

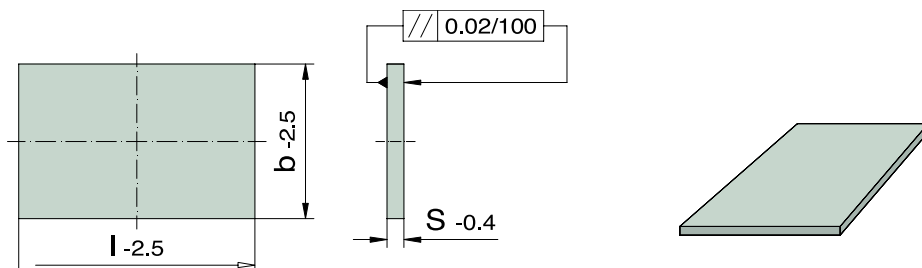


b	l	S	D
95	95	3	
100	130		
156	156		
	196		
	246		
190	246		
196	196		
	246		
206	156		
	196		
95	95	5	-
100	130		
156	156		
	196		
	246		
	296		
	396		
190	246		
	296		
196	196		
	246		
	296		
	346		
206	156		
	196		
218	246		
	296		
246	246		
	296		
	346		
	396		
254	246		
276	246		
126	156	6	
	246		
156	156		
	196		
	206		
	246		
	296		
	346		
	396		
	446		

b	l	S	D
196	196	6	
	206		
	246		
	296		
	346		
	396		
446			
496			
216	246		
	296		
	396		
246	246		
	266		
	296		
	346		
	396		
	446		
	496		
	546		
	596		
266	296	7	
196	296		
	346		
	396		
	446		
218	396		
246	246		
	296		
	346		
	396		
	446		
254	246		
276	296		
296	296		
	346		
	396		
	446		
346	346		
	396		
	446		
	496		
	546		

MISURE SPECIALI SU RICHIESTA
SPECIAL SIZES AVAILABLE ON REQUEST

PIASTRE ISOLANTI

INSULATING PLATE $P=600 \text{ N/mm}^2$

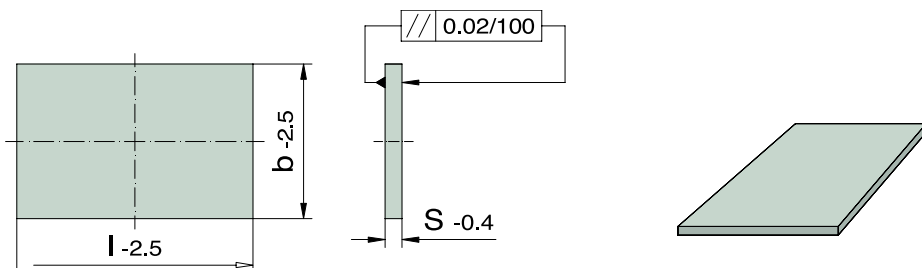

CODICE / Item no.

N50

Temperatura di applicazione:
240°C

Application temperature: 240° C

Conduttività termica: 0,25 W/mk
Thermal conductivity: 0,25 W/mk

Densità: 2,0 g/cm³
Dense: 2,0 g/cm³

Esempio di ordine:

1 pezzo N50 396/396/7

Ordering - example:

1 piece N50 396/396/7

b	l	S	D
396	396	7	
	446		
	496		
	546		
496	546		
296	296		
	346		
	396		
	446		
	496		
	546		
	596		
	646		
346	346	8	
	396		
	446		
	496		
	546		
	596		
	646		
	696		
396	396		
	446		
	496		
	546		
	596		
	646		
	696		
	796		
446	446		
	496		
	546		
	596		
	646		
496	496		
	546		
	596		
	646		
	696		

b	l	S	D
496	796	8	
546	546		
	596		
	646		
	696		
596	796		
	596		
	646		
	696		
646	696		
	796		
	896		
	996		
696	646		
	696		
	746		
	796		
746	896		
	996		
	796		
796	846		
	896		
	996		
846	896		
	996		

MISURE SPECIALI SU RICHIESTA


SPECIAL SIZES AVAILABLE ON REQUEST

CODICE / Item no.

N50

Temperatura di applicazione:
240°C
Application temperature: 240° C
Conducibilità termica: 0,25 W/mk
Thermal conductivity: 0,25 W/mk
Densità: 2,0 g/cm³
Dense: 2,0 g/cm³

PIASTRE ISOLANTI INSULATING PLATE P=600 N/mm²

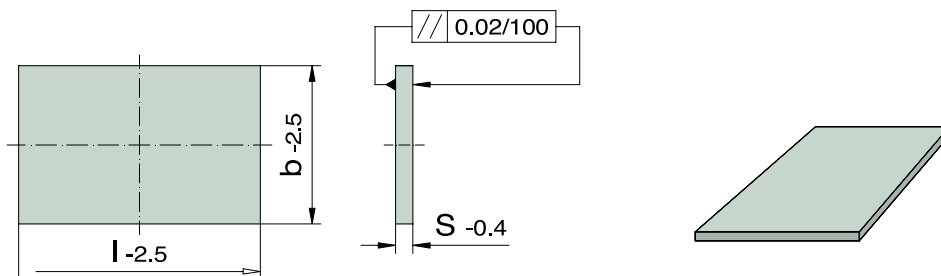

Esempio di ordine:

1 pezzo N50 246/496/8,5

Ordering - example:
1 piece N50 246/496/8,5

b	l	S	D	
246	496	8,5	-	
296	296			
	346			
	396			
	446			
	496			
	546			
	596			
346	696			
	346			
	396			
	446			
	496			
396	546			
	596			
	696			
	796			
	896			
	446			446
				496
546				
596				
696				
796				
496	896			
	496			
	546			
	596			
	696			
	796			
	896			
	996			

b	l	S	D
546	546	8,5	-
	596		
	646		
	696		
	796		
	896		
	996		
596	596		
	696		
	796		
	896		
646	996		
	596		
	696		
	796		
696	896		
	996		
	696		
	796		
796	896		
	996		
	896		
896	996		

MISURE SPECIALI SU RICHIESTA
SPECIAL SIZES AVAILABLE ON REQUEST