


PIASTRE ISOLANTI

INSULATING PLATE $P=600 \text{ N/mm}^2$

CODICE / Item no.

N51

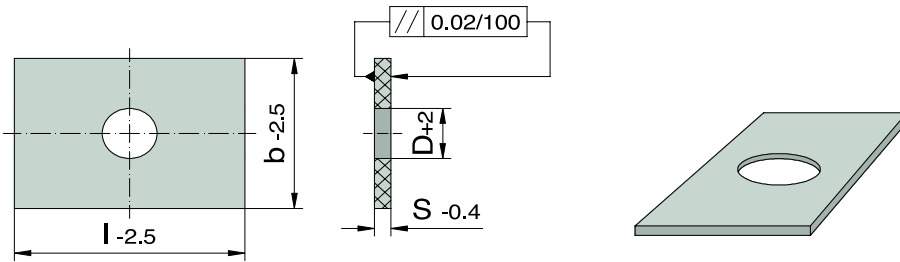

Temperatura di applicazione:
240°C
Application temperature: 240° C

Conduttività termica: 0,25 W/mk
Thermal conductivity: 0,25 W/mk

Densità: 2,0 g/cm³
Dense: 2,0 g/cm³

b	l	S	D
95	95	3	22
100	130		22
156	156		90
	196		90
	246		90
190	246		90
196	196		90
	246		90
206	156		90
	196		90
95	95	5	22
100	130		22
156	156		90
	196		90
	246		90
	296		90
	396		90
190	246		90
	296		90
196	196		90
	246		90
	296		90
	346		90
206	156		90
218	196		90
	246		90
	296		90
246	246		90
	296		90
	346		90
	396		90
254	246		90
276	246		90

b	l	S	D
126	156	6	90
	246		90
156	156		90
	196		90
	206		90
	246		90
	296		90
	346		90
	396		90
196	446		90
	196		90
	206		90
	246		90
	296		90
216	346		90
	396		90
	446		90
	496		90
246	246		90
	296		90
	396		90
	246		90
	266		90
	296		90
	346		90
	396		90
266	296		90

Esempio di ordine:

1 pezzo N51 95/95/3/22

Ordering - example:

1 piece N51 95/95/3/22


MISURE SPECIALI SU RICHIESTA
SPECIAL SIZES AVAILABLE ON REQUEST

N51

Temperatura di applicazione:
240°C
Application temperature: 240° C
Conducibilità termica: 0,25 W/mk
Thermal conductivity: 0,25 W/mk
Densità: 2,0 g/cm³
Dense: 2,0 g/cm³

Esempio di ordine:
1 pezzo N51 196/296/7/90
Ordering - example:
1 piece N51 196/296/7/90

PIASTRE ISOLANTI INSULATING PLATE P=600 N/mm²

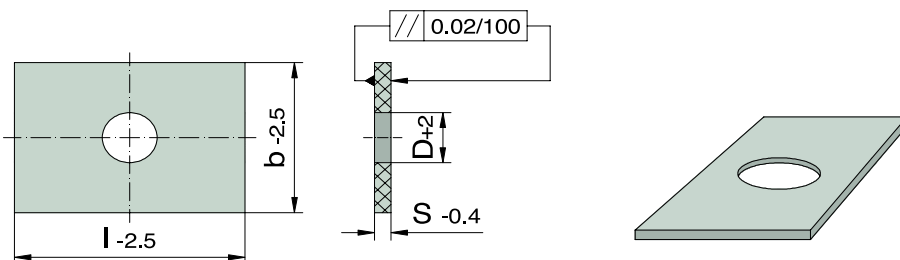


b	l	S	D
196	296	7	90
	346		90
	396		90
	446		90
218	396		90
	246		90
246	296		90
	346		90
	396		90
	446		90
254	246		90
276	296		90
296	296	90	
	346	90	
	396	90	
	446	90	
346	346	90	
	396	90	
	446	90	
	496	90	
396	396	90	
	446	90	
	496	90	
	546	90	
496	546	90	
296	296	8	90
	346		90
	396		90
	446		90
	496		90
	546		90
	596		90
646	90		
696	90		

b	l	S	D
346	346	8	90
	396		90
	446		90
	496		90
	546		90
396	596		90
	646		90
	696		90
	796		90
446	396		90
	446		90
	496		90
	546		90
	596		90
496	646	90	
	696	90	
	796	90	
	846	90	
546	546	90	
	596	90	
	646	90	
	696	90	
596	796	90	
	846	90	
	896	90	
	946	90	
646	646	90	
	696	90	
	796	90	

MISURE SPECIALI SU RICHIESTA
SPECIAL SIZES AVAILABLE ON REQUEST

PIASTRE ISOLANTI

INSULATING PLATE $P=600\text{ N/mm}^2$

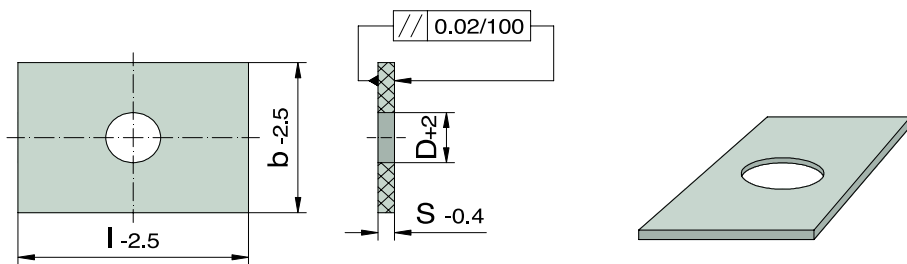

CODICE / Item no.

N51

Temperatura di applicazione:
240°C

Application temperature: 240° C

Conduktività termica: 0,25 W/mk
Thermal conductivity: 0,25 W/mk

Densità: 2,0 g/cm³
Dense: 2,0 g/cm³

b	l	S	D
246	496	8,5	90
296	296		90
	346		90
	396		90
	446		90
	496		90
	546		90
	596		90
	696		90
346	346		90
	396		90
	446		90
	496		90
	546		90
	596		90
	696		90
	796		90
396	396		90
	446		90
	496		90
	546	90	
	596	90	
	696	90	
	796	90	
	896	90	
446	446	90	
	496	90	
	546	90	
	596	90	
	696	90	
	796	90	
496	496	90	
	546	90	
	596	90	
	696	90	
	796	90	
	896	90	
996	90		

b	l	S	D	
546	546	8,5	90	
	596		90	
	646		90	
	696		90	
	796		90	
	896		90	
	996		90	
	596		596	90
696			90	
796			90	
896			90	
996			90	
646			596	90
			696	90
			796	90
	896		90	
	996		90	
	696		696	90
			796	90
			896	90
996		90		
796		796	90	
		896	90	
		996	90	
		896	896	90
	996		90	

Esempio di ordine:

1 pezzo N51 246/496/8,5/90

Ordering - example:

1 piece N51 246/496/8,5/90

MISURE SPECIALI SU RICHIESTA
SPECIAL SIZES AVAILABLE ON REQUEST