


# PIASTRE ISOLANTI

## INSULATING PLATE $P=330\text{ N/mm}^2$

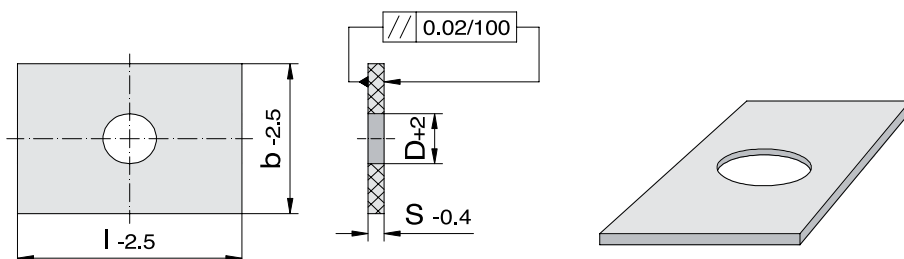

CODICE / Item no.

# N53

Temperatura di applicazione:  
230°C

Application temperature: 230° C

Conduttività termica: 0,13 W/mk  
Thermal conductivity: 0,13 W/mk

Densità: 1,6 g/cm<sup>3</sup>  
Dense: 1,6 g/cm<sup>3</sup>

b	l	S	D
95	95	3	22
100	130		22
156	156		90
	196		90
	246		90
	296		90
190	396		90
	246		90
196	296		90
	246		90
	296		90
	346		90
206	156		90
	196		90
218	246		90
	296		90
246	246		90
	296		90
254	246		90
276	246		90
	296	90	
296	296	90	
95	95	5	22
100	130		22
156	156		90
	196		90
	246		90
	296		90
190	396		90
	246		90
196	296		90
	246		90
	296		90
	346		90
206	396		90
	446		90
206	156		90
	196		90

b	l	S	D
218	246	5	90
	296		90
	396		90
246	246		90
	296		90
	346		90
	396		90
254	446		90
	496		90
	246		90
276	246		90
	296		90
	346		90
	396		90
	496		90
296	546		90
	596		90
	346		90
	396		90
346	446		90
	496	90	
	546	90	
396	396	90	
	446	90	
126	496	90	
	246	90	
156	156	6	90
	246		90
	156		90
	196		90
	206		90
	246		90
296	90		
156	346	90	
	396	90	
	446	90	

### Esempio di ordine:

1 pezzo N53 95/95/3/22

### Ordering - example:

1 piece N53 95/95/3/22

MISURE SPECIALI SU RICHIESTA  
SPECIAL SIZES AVAILABLE ON REQUEST


CODICE / Item no.

# N53

## PIASTRE ISOLANTI INSULATING PLATE P=330 N/mm<sup>2</sup>

Temperatura di applicazione:  
230°C  
Application temperature: 230° C  
Conducibilità termica: 0,13 W/mk  
Thermal conductivity: 0,13 W/mk  
Densità: 1,6 g/cm<sup>3</sup>  
Dense: 1,6 g/cm<sup>3</sup>

**Esempio di ordine:**  
1 pezzo N53 196/196/6  
**Ordering - example:**  
1 piece N53 196/196/6

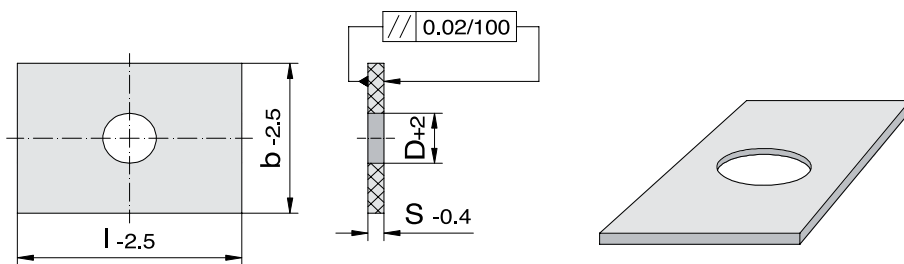


b	l	S	D
196	196	6	90
	206		90
	246		90
	296		90
	346		90
	396		90
	446		90
	496		90
216	246	90	
	296	90	
	396	90	
246	246	7	90
	266		90
	296		90
	346		90
	396		90
	446		90
	496		90
	546		90
596	90		
266	296	90	
196	296	8	90
	346		90
	396		90
	446		90
218	396	90	
	246	246	90
		296	90
346		90	
396		90	
446	90		
254	246	90	
276	296	90	
296	296	9	90
	346		90
	396		90
	446		90
346	346	10	90
	396		90
	446		90
	496		90
	546		90
396	396	90	

b	l	S	D
396	446	7	90
	496		90
	546		90
	596		90
496	546	90	
296	296	8	90
	346		90
	396		90
	446		90
	496		90
	546		90
	596		90
	646		90
346	346	9	90
	396		90
	446		90
	496		90
	546		90
	596		90
	646		90
	696		90
396	396	10	90
	446		90
	496		90
	546		90
	596		90
446	446	11	90
	496		90
	546		90
	596		90
	646		90
496	496	12	90
	546		90
	596		90
	646		90
	696		90
796	90		

MISURE SPECIALI SU RICHIESTA  
SPECIAL SIZES AVAILABLE ON REQUEST

# PIASTRE ISOLANTI

## INSULATING PLATE $P=330 \text{ N/mm}^2$

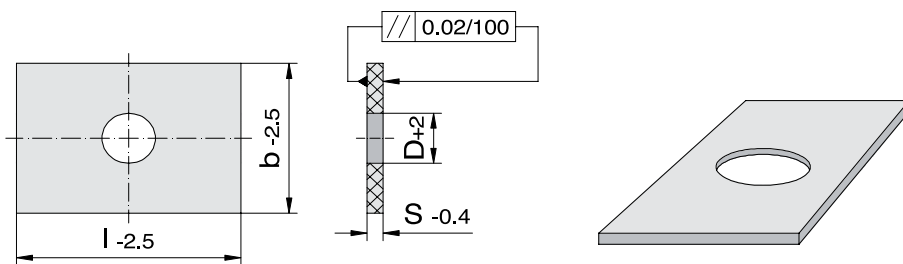

CODICE / Item no.

# N53

Temperatura di applicazione:  
230°C

Application temperature: 230° C

Conduttività termica: 0,13 W/mk  
Thermal conductivity: 0,13 W/mk

Densità: 1,6 g/cm<sup>3</sup>  
Dense: 1,6 g/cm<sup>3</sup>

b	l	S	D	
546	546	8	90	
	596		90	
	646		90	
	696		90	
	796		90	
596	596		90	
	646		90	
	696		90	
	796		90	
646	646		90	
	696		90	
	796		90	
246	496		8,5	90
	296			90
	346			90
	396	90		
	446	90		
	496	90		
	546	90		
	596	90		
	696	90		
	346	346		90
		396		90
		446		90
		496		90
546		90		
596		90		
696		90		
796	90			
396	396	90		
	446	90		
	496	90		
	546	90		
	596	90		
	696	90		
	796	90		
	896	90		

b	l	S	D
446	446	8,5	90
	496		90
	546		90
	596		90
	696		90
	796		90
	896		90
496	496		90
	546		90
	596		90
	696		90
	796		90
	896		90
546	996		90
	546		90
	596	90	
	646	90	
	696	90	
	796	90	
	896	90	
	996	90	
	596	596	90
		696	90
796		90	
896		90	
996		90	
996		90	
646	596	90	
	696	90	
	796	90	
	896	90	
	996	90	
696	696	90	
	796	90	
	896	90	
	996	90	
	996	90	
796	796	90	
	896	90	
	996	90	
896	896	90	
	996	90	

### Esempio di ordine:

1 pezzo N53 546/546/8/90

### Ordering - example:

1 piece N53 546/546/8/90

MISURE SPECIALI SU RICHIESTA  
SPECIAL SIZES AVAILABLE ON REQUEST